


## Gelcoater

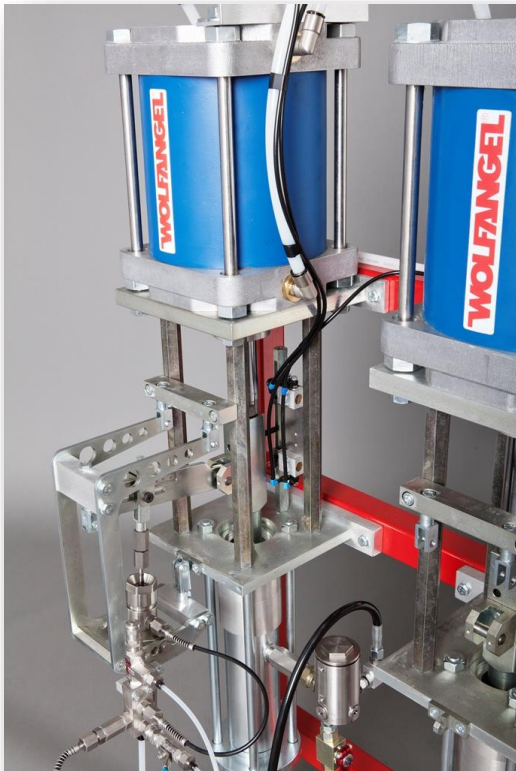

**Gelcoater 150 AM**

Gelcoat external mix with optional 2nd colour

### Standard

Gelcoater external mix	L-frame
Recirculation	High pressure gelcoat filter
Spray nozzle „Vario“	7.5 m hoses
Adjustable dosing lever	

### Options

Internal mix (IM, only 150)	Catalyst failure control
Amount counter	Additional colour units
Hose extension	Mobile cart
One or two piece boom	

# Product Information

High pressure for a perfect part surface

Gelcoat spray technology made by Wolfangel means reliability and perfect results. The Gelcoater mini finds its place everywhere in your workshop due to the small size. Gelcoat and catalyst included. Thanks to the high-pressure external mixing gun you achieve outstanding micro porosity free surfaces. No flushing needed and therefore never again cured gelcoat guns.

All Gelcoater are very well suitable to spray filled gelcoats, e. g. flame retardant gelcoats.

Video gelcoat spraying: <http://youtu.be/DG3dGZvzeM>

Video hardener rotary adjustment: <https://youtu.be/hXf4RKvQ-mY>

Video ergo.gun: <https://youtu.be/gsxhKi84TKg>

Gelcoater	44	150
Power	Compressed air	
Pressure ratio	46:1	47:1
Max. air pressure	6 bar	
Air consumption	~ 270 l/min	~ 1,100 l/min
Capacity per double stroke	44 cc	150 cc
Max. output <small>(dep. on viscosity, hose length and diameter)</small>	~ 0.7 l/min	~ 2.2 l/min
Catalyst dosing ratio	1.0 – 3.5 %	1.0 – 3.4 %

Subject to technical modifications



**Gelcoater 44**  
on mobile cart



**Gelcoater 150**  
with optional gelcoat heater and Spray Progress Display



**ergo.gun**